


2CU

Fusion Capability for 1/2" CTS to 2" IPS (16mm - 60mm)

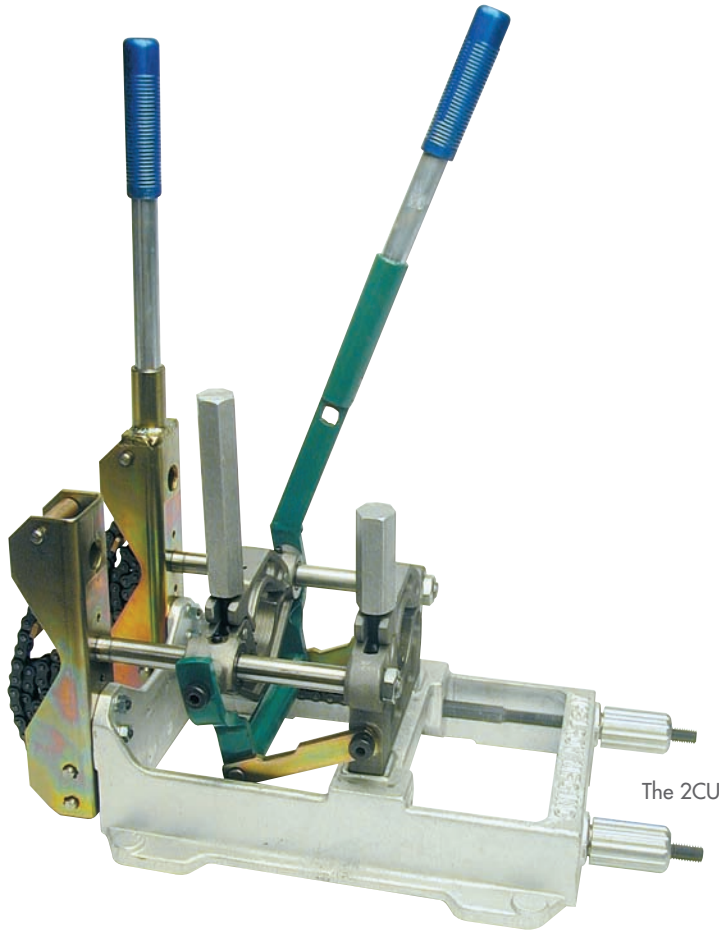

The 2CU

OVERVIEW

The 2CU will butt fuse 1/2" CTS to 2" IPS (16mm to 60mm) pipe, tees, ells and other fittings. The combination unit (CU) incorporates McElroy's patented combination sidewall feature. Sidewall clamps with chain vise allow the unit to be attached on the centerline of a pipe main for sidewall fusion of 1/2" to 2" service saddles, round base branch saddles and small tapping tees.

The 2CU is equipped with chain lengths that will clamp on pipe sizes up to 8" IPS. Additional chain lengths are available for larger pipe sizes.

A range of accessories are available for the 2CU, including a Manual Fusion Machine Stand that brings fusion operations to a comfortable level.

FEATURES

- Operator maintains fusion force
- Compact and durable
- Sidewall capabilities for 1/2" to 2" fittings
- Butt fuses a variety of fittings and pipe
- Serrated jaws and inserts keep pipe from slipping during fusion process

041111

SPECIFICATIONS

CAPACITY

Fuses Pipe Sizes:.....1/2" CTS - 2" IPS (16mm - 60mm)

MODELS

A200101:.....100V-120V, 50/60Hz, 800 Watt, 1 Phase Input Voltage Requirement

A200102:.....200V-240V, 50/60Hz, 800 Watt, 1 Phase Input Voltage Requirement

POWER

Heater Power: 800 Watt


Facer Power: Hand-operated

WEIGHT

Machine: 28 lbs. (12.7 Kg)

Facer: 7.9 lbs. (3.54 Kg)

Heater: 7.24 lbs. (3.28 Kg)

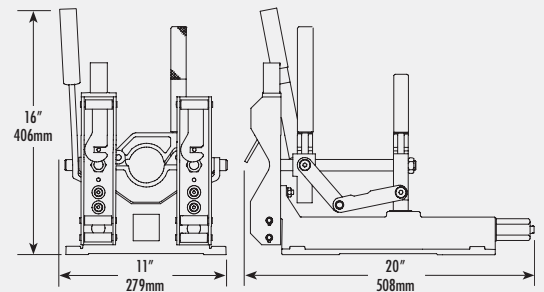

The 2CU

INCLUSIONS

The 2CU includes fusion machine, heater, facer, insulated heater/facer stand and screw/driver kit.

Specifications subject to change without notice.



M McELROY
www.mcelroy.com